



# LOADALL | 508-66

Gross power – 74hp Lift Capacity: 8000lbs Lift Height: 66ft

NEW



## UNRIVALLED COST OF OWNERSHIP

- 1 **No DEF or DPF** thanks to the 74hp JCB EcoMAX engine. Full JCB built drivetrain ensures performance is maximized with all components configured specifically for the Loadall.
- 2 **Industry leading service intervals** and simple ground level daily checks ensures the JCB Loadall spends more time on site than in the shop.
- 3 **By producing high levels of power and torque** even at engine speeds as low as 1300–1400rpm, EcoMAX can provide fuel-efficient matching of transmission and hydraulics.

## UNRIVALLED PRODUCTIVITY & PERFORMANCE

- 1 **JCB's regenerative hydraulics** harness gravitational forces to make boom lowering and retract more energy efficient and highly productive.
- 2 **66ft lift height** means the JCB Loadall can reach 6 floors which will reduce the usage of a mobile crane.
- 3 **For added versatility**, all JCB Loadalls are fitted as standard with a single boom auxiliary feature which can power a wide range of attachments.

## UNRIVALLED SAFETY FEATURES

- 1 **Industry leading visibility** thanks to the low boom profile and pivot means that operators get excellent visibility all around the machine.
- 2 **A reversing alarm, pulse radar system and rear mounted camera options** ensures workers are kept safe on site.
- 3 **JCB factory-fit immobilizers** can either be activated by a unique key or optional push button PIN system which automatically arms the system after a certain period following engine shutdown.

		508-66
Maximum lift height	ft	66
Maximum lift capacity	lbs	8000
Maximum forward reach	ft	52
Overall height	ft	8.86
Overall width over tires	ft	7.87
Overall length to front carriage	ft	22.38
Turn radius over tires	ft	13.45
Total weight (unladen)	lbs	28627
Tires		440 / 80-24
Engine	hp (kW)	74 (55)

## PLATFORM SOLUTION

COMING SOON

- New galvanized, robust, overload sensors, rear axle lock, single lever control
- Trimming of Tilt Function below 15 degrees

### 1 PLATFORM READY MODELS

#### 2 FIXED PLATFORM 7ft


- Maximum Load: 800lbs
- Max Occupants: 3
- Double-sided entry

#### 3 EXTENDABLE PLATFORM 7.5ft – 14.5ft

- Maximum Load: 1100lbs
- Max Occupants: 3
- 180 degree slew
- Single sided entry

#### 4 EXTENDABLE PLATFORM 7.5ft – 14.5ft

- Maximum Load: 2200lbs
- Max Occupants: 3
- 180 degree slew
- Single sided entry

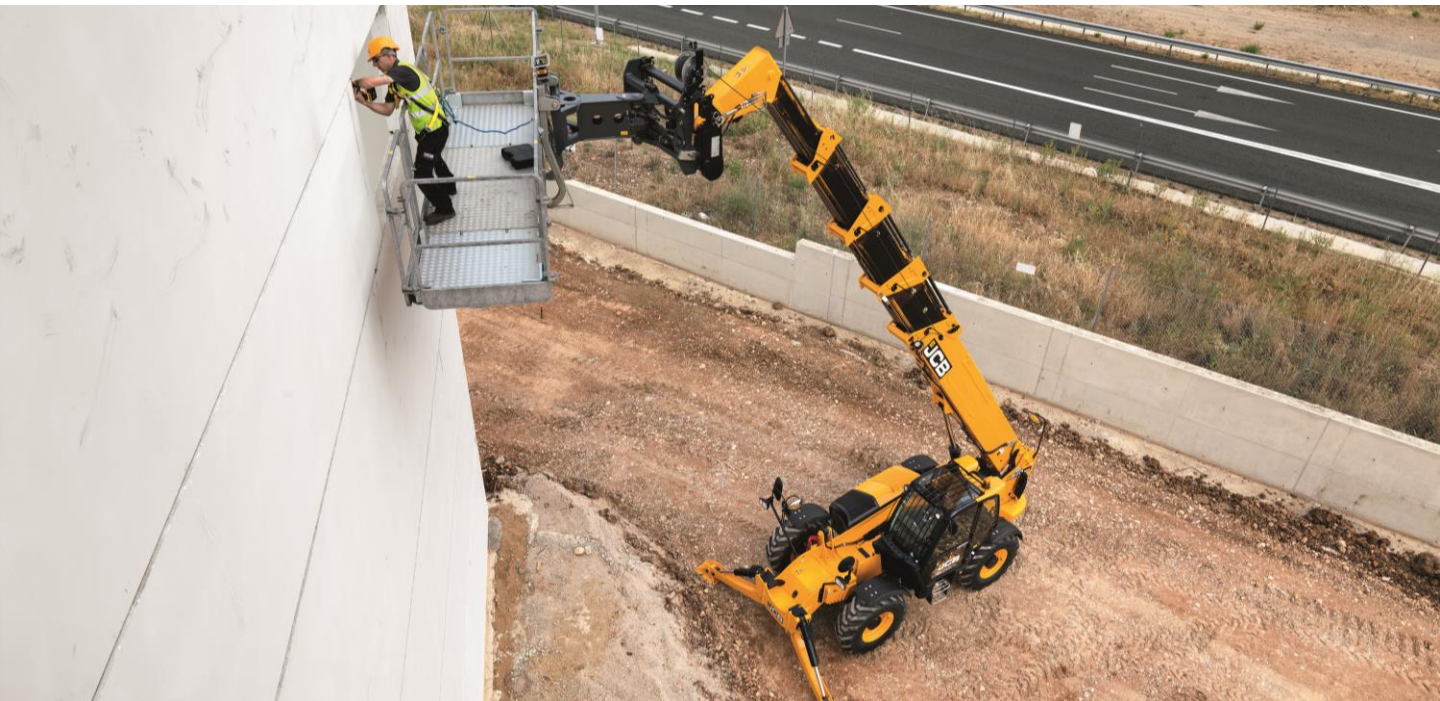

[www.jcb.com](http://www.jcb.com)

©2016 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.